


# CyberView

RP615/717/819/920

minimum rack space, maximum control.

## RP615/717/819/920 SERIES

### Rackmount LCD Screen

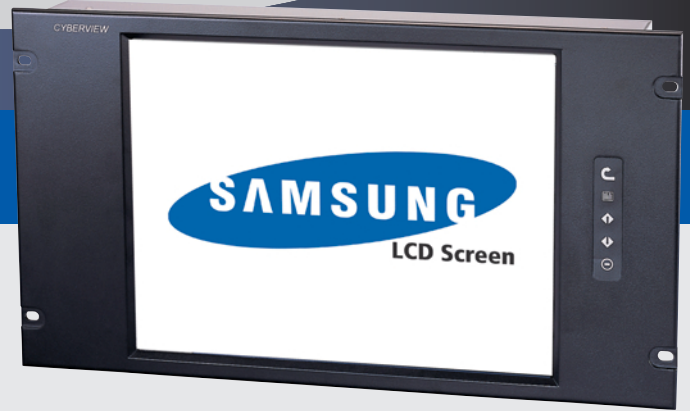

CyberView RP615 / 717 / 819 / 920 Series

## A rack mountable LCD screen

### PRODUCT FEATURES & BENEFITS

6U / 7U / 8U / 9U LCD SCREEN

ALL MOUNTING HARDWARE INCLUDED

UP TO 20" LCD

ALLOWS SIMPLE, QUICK AND SECURE INSTALLATION

BUILT IN ON SCREEN DISPLAY CONTROLLED BY INTEGRAL MEMBRANE SWITCHES


ALLOWS ADJUSTMENT OF COLOR, CONTRAST, BRIGHTNESS, H POSITION, V POSITION, AUTO CONFIGURE, OSD, ETC

### THE CYBERVIEW SOLUTION...

CyberView offers its users a flexible, space saving, cost effective method of managing multiple servers from a single unit, either locally within the data centre, or remotely via the World Wide Web using secure IP access.

CyberView is available in 1U and 2U height options, depths include 440mm for 600 deep racks or 650mm for 800 deep racks, with complete unit configuration flexibility of simply LCD drawer, Keyboard drawer, LCD Keyboard Drawer or LCD Keyboard Drawer with KVM (Keyboard, Video and Mouse) switch.

To cater for today's ever demanding working environments and applications CyberView is available in 15, 17 or 19" LCD screens with a wide selection of keyboard layouts and languages, including vendor application specific units i.e. full SUN Microsystems Solaris v10 compatibility when using our S Series solutions.



AV INPUT



DC INPUT



TOUCHSCREEN



**Austin Hughes**  
Europe

©Austin Hughes Europe Limited 2005, All Rights Reserved.



## LCD SPECIFICATION RP615/717/819/920 SERIES

PANEL	15" LCD SERIES	17" LCD SERIES	19" LCD SERIES	20" LCD SERIES
DISPLAY TYPE	Active matrix TFT colour LCD	Active matrix TFT colour LCD	Active matrix TFT colour LCD	Active matrix TFT colour LCD
MAX RESOLUTION	1024 x 768 XGA	1280 x 1024 SXGA	1280 x 1024 SXGA	1600 x 120 UXGA
PIXEL PITCH	0.297(H) x 0.297(W) mm	0.264(H) x 0.264(W) mm	0.294(H) x 0.294(W) mm	0.255(h) x 0.255(w) mm
CONTRAST RATIO	300:1	500:1	700:1	700:1
BRIGHTNESS	450 cd / m2	300 cd / m2	300 cd / m2	280 cd / m2
RESPONSE TIME	Tr=5 / Tf=20 ms	Tr=3 / Tf=10 ms	Tr=15 / Tf=10ms	Tr=6 / Tf=10 ms
DISPLAY COLOURS	16.2M	16.2M	16.7M	16.7M
VIEWING ANGLE (TYPICAL)	140 (Horiz.) / 115 (Vert.)	150 (Horiz.) / 135 (Vert.)	150 (Horiz.) / 135 (Vert.)	178 (Horiz.) x 178 (Vert.)
OPERATING TEMP (°C)	0 to 50	0 to 50	0 to 50	0 to 50
STORAGE TEMP (°C)	-25 to 60	-25 to 60	-25 to 60	-25 to 60

## RP615/717/819/920 SERIES

### Rackmount LCD Screen




## SIZE SPECIFICATION

UNIT TYPE	15" UNIT	17" UNIT	19" UNIT	20" UNIT
UNIT DIMENSIONS (CM)	48 x 26.5 x 4	48 x 35.5 x 4.5	48 x 35.5 x 7	48 x 39.9 x 7
PACKAGED DIMENSIONS (CM)	42 x 57 x 21	51 x 57 x 21	51 x 57 x 21	51 x 57 x 21
UNIT WEIGHT (KG)	5	7	9	12
PACKAGED WEIGHT (KG)	7	10	12	15

## POWER SUPPLY

REMOTE ADAPTER	110V-220V AC Input - 12V 5A Output
ADAPTER SIZE	10.8(L) x 6.1 (W) x 3(H) cm
CABLE LENGTH (MAINS TO ADAPTER)	182cm
CABLE LENGTH (ADAPTER TO UNIT)	180cm
SAFETY APPROVAL	UL / CE

## OPTIONS AVAILABLE:



AV INPUT



DC INPUT



TOUCHSCREEN

**NOTE: Technical Information.**  
All information contained in this information sheet was correct at the time of going to press. Images are used for illustration purposes and are subject to change at the manufacturers discretion. E&OE.

